


16W LED Oyster Light

MODEL: EMR16LEDS



- White powder coated steel body.
- Ceiling mounted
- Large size connector, and easy to fit multiple cables
- LED technology with a long life over 50000 hours
- Three years full warranty on the complete fitting.
- Emergency Light classification D32

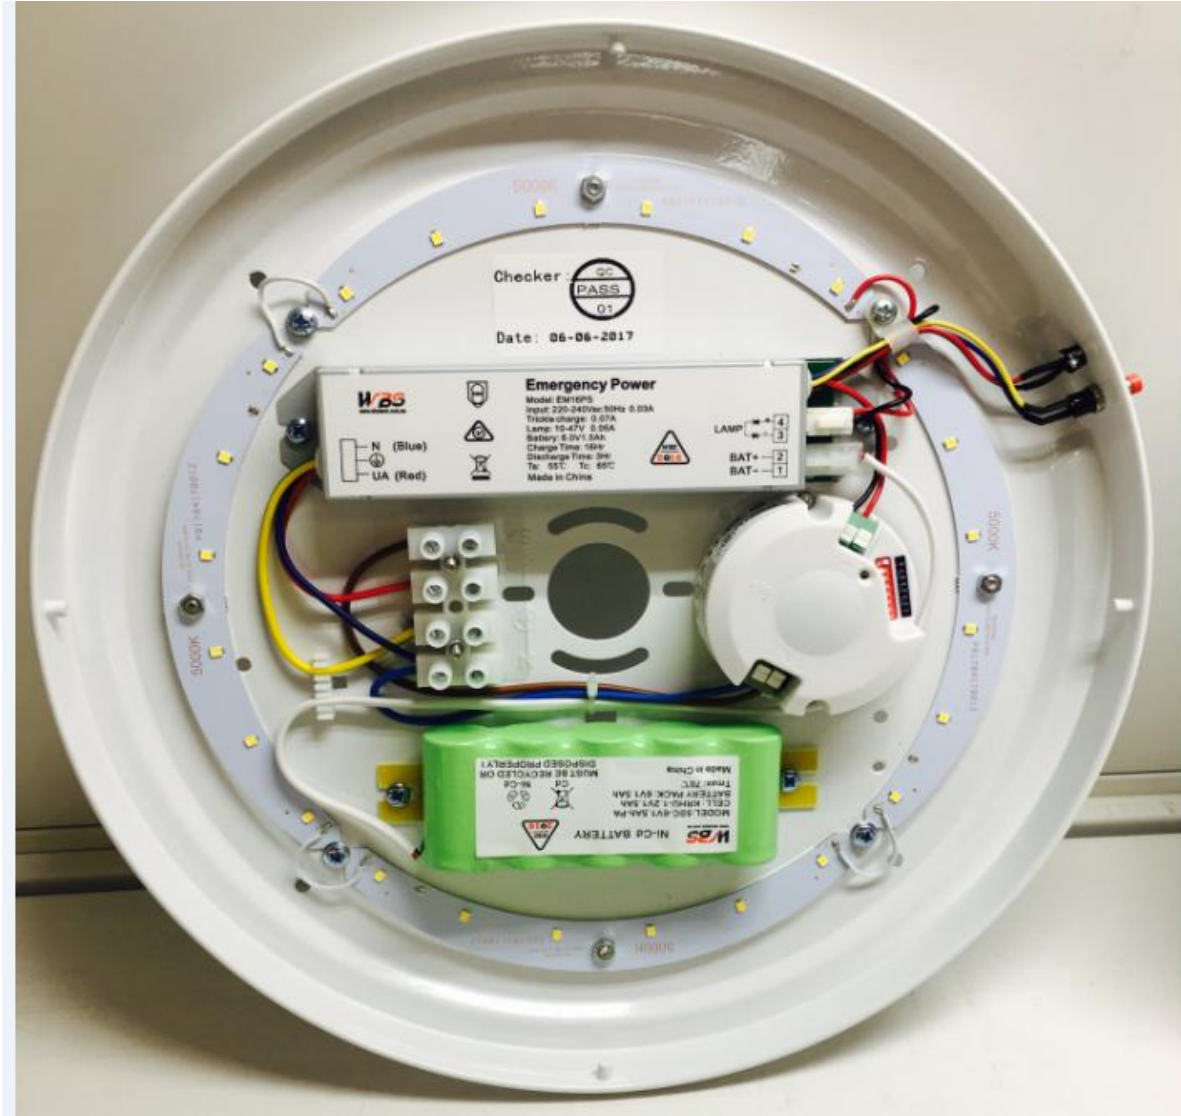


Specifications

ref number	Colour	Watts	Voltage	Colour temp	Avg Lamp hrs	Lumen Flux	Lumen Flux Dim down	Height	Outside Diameter	Inside Diameter	RA	IP
EMR16LED	White	16	240	5000k/3000k	50,000	1500Lm	200 lm	115	122	370	>80	IP20

DIMENSION

All measurements in mm.

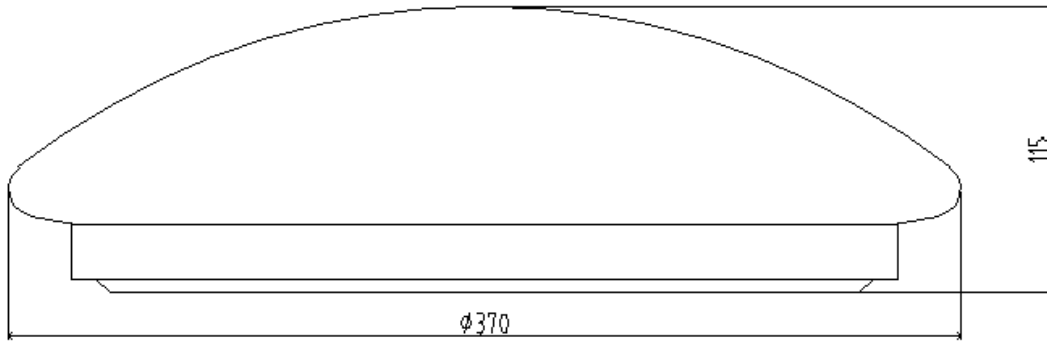

D

		Sensitivity		ON Time				Daylight Sensor			Stand by time			Stand by brightness	
Switches		1		2	3			4	5		6	7		8	
UP	ON	ON	10m	ON	ON	5 Sec		ON	ON	Disable	ON	ON	0 S	ON	10
Dn	Off			Off	ON	90 Sec		Off	ON	50Lux	Off	ON	30s		
		Off	5m	ON	-Off	3 min		ON	Off	15 Lux	ON	Off	10 m	Off	25%
				Off	-Off	10 mins		Off	Off	5 Lux	Off	Off	∞		

*Default shaded grey all up(on) but Eight off

*Note if standby time infinity Day sensor will be disabled.

* Normal light function On then Off.

3. INSTALLATION

1. Separate the diffuser from the disk body. Install the disk body on the ceiling first
2. Connect the Mains cable to the 4 ports connector.

Mark	Description	Building wiring cable
UA	Un switched Active	Unswitched Active
SA	Switched Active	Switch cable
N	Neutral	Neutral cable
E	Earth	Earth cable

